

इंटरनेट

मानक

Disclosure to Promote the Right To Information

Whereas the Parliament of India has set out to provide a practical regime of right to information for citizens to secure access to information under the control of public authorities, in order to promote transparency and accountability in the working of every public authority, and whereas the attached publication of the Bureau of Indian Standards is of particular interest to the public, particularly disadvantaged communities and those engaged in the pursuit of education and knowledge, the attached public safety standard is made available to promote the timely dissemination of this information in an accurate manner to the public.

“जानने का अधिकार, जीने का अधिकार”

Mazdoor Kisan Shakti Sangathan

“The Right to Information, The Right to Live”

“पुराने को छोड़ नये के तरफ”

Jawaharlal Nehru

“Step Out From the Old to the New”

IS 8521-2 (1994): Industrial safety face-shields, Part 2:
With wire mesh visor [CHD 8: Occupational Safety, Health
and Chemical Hazards]



“ज्ञान से एक नये भारत का निर्माण”

Satyanarayan Gangaram Pitroda

“Invent a New India Using Knowledge”



“ज्ञान एक ऐसा खजाना है जो कभी चुराया नहीं जा सकता है”

Bhartrhari—Nitiśatakam

“Knowledge is such a treasure which cannot be stolen”

BLANK PAGE



IS 8521 (Part 2) : 1994

(Reaffirmed 2002)

भारतीय मानक

औद्योगिक सुरक्षा फेसशील्ड — विशिष्ट

भाग 2 तार की जाली वाले वाइजर सहित

Indian Standard

**INDUSTRIAL SAFETY FACESHIELDS —
SPECIFICATION**

PART 2 WITH WIRE-MESH VISOR

UDC 614·893·6·614 : 838·442

© BIS 1994

BUREAU OF INDIAN STANDARDS
MANAK BHAVAN, 9 BAHADUR SHAH ZAFAR MARG
NEW DELHI 110002

February 1994

Price Group 3

FOREWORD

This standard was adopted by the Bureau of Indian Standards, after the draft finalized by the Industrial Safety Sectional Committee had been approved by the Chemical Division Council.

IS 8521 (Part 1) : 1977 'Specification for industrial faceshield : Part 1 With plastic visor' is meant for use by industrial workers in tool working operations against chips and saw dust, in metal machining operation against flying particles, in buffing, polishing and grinding operation where particles may strike the face, in spot welding and in handling of corrosive materials. The industrial safety faceshields (with wire mesh visor) covered by this standard may be used to protect face against heat and glare from the furnaces and wherever heated material is handled.

In the preparation of this standard, assistance has been taken from the ANSI Z-87.1-1984 'Practice for occupational and educational eye and face protection', published by the American National Standards Institute, USA.

The composition of the committee responsible for formulation of this standard is given at Annex A.

For the purpose of deciding whether a particular requirement of this standard is complied with, the final value, observed or calculated, expressing the result of a test or analysis, shall be rounded off in accordance with IS 2 : 1960 'Rules for rounding off numerical values (*revised*)'. The number of significant places retained in the rounded off value shall be the same as that of the specified value in this standard.

*Indian Standard***INDUSTRIAL SAFETY FACESHIELDS—
SPECIFICATION****PART 2 WITH WIRE-MESH VISOR****1 SCOPE**

This standard prescribes requirements for industrial faceshields with wire mesh visor used for protection of the face against heat and glare during furnace operations and operations involving hot material, molten metal and slags, and their methods of test and sampling.

2 REFERENCES

2.1 The following Indian Standard is necessary adjunct to this standard:

<i>IS No.</i>	<i>Title</i>
4905 : 1968	Method for random sampling

3 CLASSIFICATION

The faceshields shall be of two types depending upon the size of the visor as mentioned below:

Type 1 — Faceshields with visor size of 230 mm in width and 230 mm in length, and

Type 2 — Faceshields with visor size of 305 mm in width and 230 mm in length.

4 MATERIALS

4.1 Materials used in the manufacture of faceshields shall be non-magnetic, heat resistant and shall have mechanical strength and lightness of weight. The materials shall also be non-irritating to the skin.

4.2 The headgear of the faceshield shall be fabricated of suitable heat resistant materials of at least 1.4 mm thickness. Headgear shall consist of a crown band of at least 25 mm width, an adjustable head-band and sweatband. The adjustable devices shall be made of non-sparking heat resistant material capable of withstanding temperatures up to 150°C without getting deformed and shall have no sharp edges.

4.3 Visor shall be manufactured in the form of plain weave type wire mesh with stainless steel or other such non-magnetic materials. The

wire-mesh shall be made out of wire of 0.5 mm diameter.

5 REQUIREMENTS**5.1 Design**

The faceshields shall be designed to provide protection to the face (that is, the front of the head including forehead, eyes, cheeks, nose, mouth and chin) and neck, when required, from heat and glare during furnace operations and handling of hot materials, molten metal and slags. Both Type 1 and Type 2 faceshields shall be designed for comfort and shall be worn directly on the user's head.

The faceshields of both the types shall consist essentially of a headgear including an adjustable head-band and crown band, a durable tilting visor support with or without crown protector, metal wire-mesh visor and a removable and replaceable sweatband. The faceshield shall be similar to Fig. 1 and shall also comply with the test requirements specified in 5.4.

5.1.1 Headgear

The design of the headgear shall be such as to hold the visor and visor support comfortably and firmly in place on the wearer's head, and shall have provision for tilting the visor away from the face. Adjustable bands of the faceshield headgear shall be of the positive locking type of adequate range and adjustable at back and top with the help of ratchet or wing nut arrangement. The headgear shall be adjustable without the use of tools and shall hold firmly in place after being so adjusted. The crown strap or band shall be attached to, and extended between, the front and rear centres or from the middle sides of the headband. It shall form an arch over the head to assist in positioning and holding the headgear in place. All mechanisms and movements shall be protected so that the wearer's hair cannot catch in the adjusting devices. Not less than the forehead portion of the headband shall be provided with a removable and replaceable cushioned sweatband that shall be non-irritating and non-toxic.

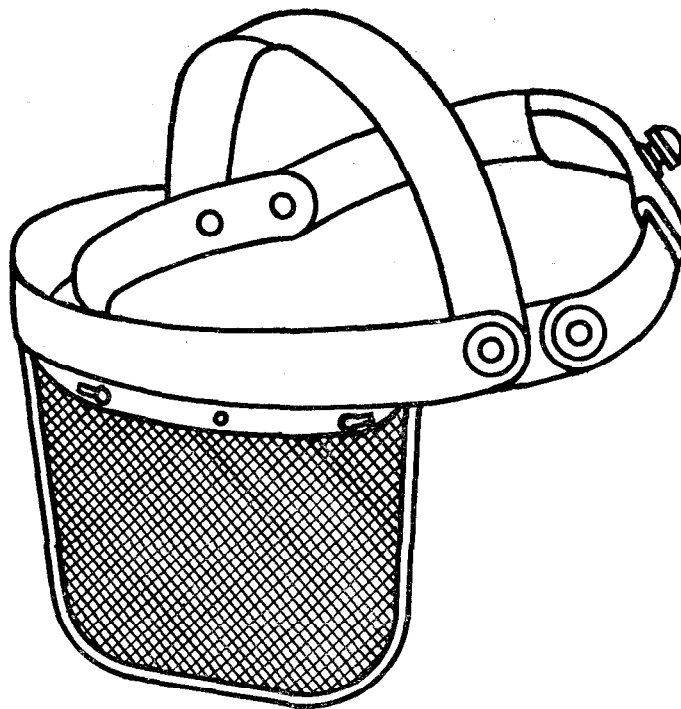


FIG. 1 FACESHIELDS WITH WIRE-MESH VISOR

5.1.2 Visor Support

The faceshield visor support shall be furnished with or without a crown protector as agreed to between the purchaser and the supplier. Visor support shall be made of suitable heat resistant materials of at least 1.4 mm thickness and designed for easy removal or replacement of visor. Visor supports shall be provided with snap fastener studs or a combination of snap fastener studs with other suitable holder studs for attaching the visor in a secured manner. Studs shall be equidistantly spaced to provide for maximum interchangeability. Support shall be attached to the headgear by friction joints which permit tilting of the visor either upward to be clear of the horizontal vision line or downward to a position of maximum protection with clearance for the nose, and over eye-glasses or

goggles when used. The tension of the tilting mechanism shall be sufficient to hold the visor in up or down position without slippage.

5.1.3 Visor

The wiremesh visor shall be made of stainless steel wire and weaving area between the wires shall be 1 mm². Edges of wire-mesh of the visor shall be covered on all sides with soft aluminium sheet of 10 mm width and minimum 0.5 mm thickness. The upper side of the visor shall also be covered with soft aluminium sheet of minimum 0.5 mm thickness and 20 mm width. The aluminium sheet shall be rivetted to the visor with suitable material. Bottom corners and sharp edges shall be rounded off. The wire-mesh visor shall be similar to that shown in Fig. 2 and shall also comply with the test requirements given in 5.4.

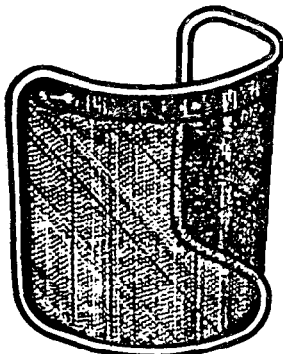


FIG. 2 VISOR, WIRE-MESH

5.1.4 Sweatbands

Sweatbands shall be of non-toxic, non-irritating, cushioning material and shall be of removable and replaceable type. Sweatbands shall cover not less than the forehead portion of the headband.

5.2 Workmanship

Workmanship shall be such that all faceshields shall be free from any defects which might affect appearance, functionality, and serviceability.

5.3 Interchangeability

All parts having the same manufacturer's part number shall be directly and completely interchangeable with respect to installation and performance.

5.4 Disinfection Test

5.4.1 All faceshield materials shall be such as to withstand, without visible deterioration and corrosion, washing in detergent and warm water; rinsing to remove all traces of detergent; and disinfection by one or more of the following methods:

- a) Immersion for 10 minutes in a solution of formalin made by mixing one part of 40 percent formaldehyde solution with 9 parts of water at room temperature ($27 \pm 2^\circ\text{C}$);
- b) Subjection to a moist atmosphere of formaldehyde of 90 percent humidity for a period of 10 minutes at room temperature ($27 \pm 2^\circ\text{C}$); and
- c) Immersion for 10 minutes in a solution of modified phenolics, hypochlorite, or quaternary ammonium compounds in strength specified by the manufacturer at room temperature ($27 \pm 2^\circ\text{C}$).

6 PACKING, MARKING AND INSTRUCTIONS FOR USE

6.1 Faceshields and accessories shall be packed in a manner which shall ensure safe delivery at destination.

6.2 The containers shall be marked with at least the following information:

- a) Identification of the source of manufacture;

- b) Name and type of faceshield;
- c) Special visors or accessories, if provided;
- d) Date of manufacture; and
- e) Batch/Code number.

6.3 Instructions regarding the use of disinfection and maintenance of the equipment shall be provided by the manufacturers in an unambiguous manner along with each faceshield.

7 SAMPLING

7.1 Lot

All faceshields of the same type, class, and size manufactured from the same material under similar conditions of production shall be grouped together to constitute a lot.

7.2 Sample Size

The number of faceshields to be selected from each lot shall depend upon the size of the lot and shall be in accordance with Table 1.

Table 1 Scale of Sampling

Lot Size	Sample Size	Acceptance Number
(1)	(2)	(3)
Up to 100	20	1
101 to 150	32	2
151 to 300	50	3
301 to 500	80	5
501 to 1 000	125	7
1 001 to 3 000	200	10
3 001 and above	315	14

7.2.1 These faceshields in the sample shall be selected from the lot at random. For this purpose reference may be made to IS 4905 : 1968.

7.3 Each of the faceshields selected in the sample shall be subjected to the test mentioned in the standard. A faceshield failing to meet anyone or more of the requirements of the standard shall be considered as defective. The lot shall be considered as conforming to the requirements of this standard if number of defectives found in the sample is less than or equal to the corresponding acceptance number given in column 3 of Table 1.

ANNEX A

(Foreword)

COMMITTEE COMPOSITION

Composition of Industrial Safety Sectional Committee, CHD 008

<i>Chairman</i>	<i>Representing</i>
SHRI K. C. GUPTA	National Safety Council, Bombay
<i>Members</i>	
SHRI PREM BAWEJA	Hindustan Aeronautics Limited, Bangalore
SHRI B. VIJAY KUMAR (<i>Alternate</i>)	Employees State Insurance Corporation, Calcutta
SHRI BHAGWATI PRASAD	Directorate General of Technical Development, New Delhi
SHRI SATISH CHANDER (<i>Alternate</i>)	Defence Institute of Fire Research, New Delhi
DR S. C. CHAWLA	Directorate General of Mines Safety, Dhanbad
SHRI M. K. BANERJEE (<i>Alternate</i>)	Institute of Fire Engineers (India), New Delhi
SHRI P. K. CHATTERJEE	Central Boiler Board, New Delhi
SHRI H. S. KAPRAWAN (<i>Alternate</i>)	Mining, Geological and Metallurgical Institute of India, Calcutta
DIRECTOR (MINES SAFETY)	Safety Appliances Manufacturers Association, Calcutta
SHRI A. K. RUDRA (<i>Alternate</i>)	Standing Committee on Safety for Steel Industries, Ranchi
SHRI H. S. GAHLAUT	Directorate General, Factory Advice Services and Labour Institute, Bombay
SHRI B. R. MEHTA (<i>Alternate</i>)	Factory Inspectorate, Government of Maharashtra, Bombay
SHRI V. K. GOEL	Chief Controller of Explosives, Nagpur
SHRI M. L. AHUJA (<i>Alternate</i>)	Central Mining Research Station, Dhanbad
SHRI S. P. GOENKA	Standing Fire Advisory Council, New Delhi
SHRI N. DUTTA (<i>Alternate</i>)	Indian Pesticide Association, New Delhi
SHRI M. KANT	Directorate General, Civil Aviation (National Airport Authority), New Delhi
SHRI KIRIT MARU (<i>Alternate</i>)	Bhabha Atomic Research Centre, Bombay
DR J. MAHAPATRA	Ministry of Petroleum and Natural Gas (Oil Industries Safety Directorate), New Delhi
SHRI M. K. MALHOTRA	National Safety Council, Bombay
SHRI H. N. MIRASHI	Indian Cotton Mills Federation, Bombay
DR H. MUKHERJEE	Indian Chemical Manufacturers Association, Calcutta
SHRI C. M. SHARMA (<i>Alternate</i>)	Central Leather Research Institute, Madras
SHRI R. N. MUKHERJEE	Confederation of Indian Industries, New Delhi
SHRI A. BANERJEE (<i>Alternate</i>)	Indian Space Research Organization, Government of India (Department of Space), Andhra Pradesh
SHRI S. K. MUKHERJI	National Institute of Occupational Health, Ahmedabad
SHRI A. K. GHOSH (<i>Alternate</i>)	Director General, BIS (<i>Ex-officio Member</i>)
SHRI P. S. PRUTHI	
SHRI SURESH KAPOOR (<i>Alternate</i>)	
SHRI P. RAJENDRAN	
SHRI H. S. RAWAT (<i>Alternate</i>)	
SHRI A. RAMAMURTHY	
SHRI K. RAVICHANDRA	
SHRI M. SRIVASTVA (<i>Alternate</i>)	
SHRI A. J. REGO	
SHRI A. K. CHATTERJEE (<i>Alternate</i>)	
SHRI M. R. SAMPATH	
SHRI O. N. DAGA (<i>Alternate</i>)	
SHRI SURENDRA KUMAR	
SHRI R. PARTHASARTHY (<i>Alternate</i>)	
REPRESENTATIVE	
REPRESENTATIVE	
REPRESENTATIVE	
REPRESENTATIVE	
DR R. K. SINGH,	
Director (Chemicals)	

Member-Secretary

SHRI P. MUKHOPADHYAY
Joint Director (Chemicals)

(Continued on page 5)

(Continued from page 4)

**Composition of Personal Protective Equipment (Non-Respirators)
Subcommittee, CHD 08 : 02**

Convener

SHRI M. K. MALHOTRA

*Representing*Directorate General, Factory Advice Services and Labour Institute
Bombay*Members*

SHRI J. CHAKRABORTY

SHRI R. K. POOJARI (*Alternate*)

SHRI M. KANT

SHRI KAMLESH DAND (*Alternate*)

SHRI G. B. MEHTA

SHRI R. N. MUKHERJEE

DR S. RAHUT

DR JOGESH NIJHAWAN (*Alternate*)

SHRI HEATHCLIFF VAZ

SMT ZEENA VAZ (*Alternate*)

REPRESENTATIVE

REPRESENTATIVE

Steel Authority of India Ltd (Durgapur Steel Plant), Durgapur

Safety Services, Bombay

Century Rayon, Kalyan

Central Mining Research Station, Dhanbad

National Test House, Calcutta

Francis Leslie, Bombay

Office of the Development Commissioner, New Delhi

Bharat Heavy Electrical Ltd, Trichi

Standard Mark

The use of the Standard Mark is governed by the provisions of the *Bureau of Indian Standards Act, 1986* and the Rules and Regulations made thereunder. The Standard Mark on products covered by an Indian Standard conveys the assurance that they have been produced to comply with the requirements of that standard under a well defined system of inspection, testing and quality control which is devised and supervised by BIS and operated by the producer. Standard marked products are also continuously checked by BIS for conformity to that standard as a further safeguard. Details of conditions under which a licence for the use of the Standard Mark may be granted to manufacturers or producers may be obtained from the Bureau of Indian Standards.

Bureau of Indian Standards

BIS is a statutory institution established under the *Bureau of Indian Standards Act, 1986* to promote harmonious development of the activities of standardization, marking and quality certification of goods and attending to connected matters in the country.

Copyright

BIS has the copyright of all its publications. No part of these publications may be reproduced in any form without the prior permission in writing of BIS. This does not preclude the free use, in the course of implementing the standard, of necessary details, such as symbols and sizes, type or grade designations. Enquiries relating to copyright be addressed to the Director (Publications), BIS.

Review of Indian Standards

Amendments are issued to standards as the need arises on the basis of comments. Standards are also reviewed periodically; a standard along with amendments is reaffirmed when such review indicates that no changes are needed; if the review indicates that changes are needed, it is taken up for revision. Users of Indian Standards should ascertain that they are in possession of the latest amendments or edition by referring to the latest issue of 'BIS Handbook' and 'Standards Monthly Additions'.

This Indian Standard has been developed from Doc No. CHD 8 (68).

Amendments Issued Since Publication

Amend No.	Date of Issue	Text Affected

BUREAU OF INDIAN STANDARDS

Headquarters:

Manak Bhavan, 9 Bahadur Shah Zafar Marg, New Delhi 110002
Telephones : 331 01 31, 331 13 75

Telegrams : Manaksanstha
(Common to all offices)

Regional Offices :

Telephone

Central : Manak Bhavan, 9 Bahadur Shah Zafar Marg
NEW DELHI 110002

{ 331 01 31
{ 331 13 75

Eastern : 1/14 C. I. T. Scheme VII M, V. I. P. Road, Maniktola
CALCUTTA 700054

{ 37 84 99, 37 85 61
{ 37 86 26, 37 86 62

Northern : SCO 445-446, Sector 35-C, CHANDIGARH 160036

{ 53 38 43, 53 16 40
{ 53 23 84

Southern : C. I. T. Campus, IV Cross Road, MADRAS 600113

{ 235 02 16, 235 04 42
{ 235 15 19, 235 23 15

Western : Manakalaya, E9 MIDC, Marol, Andheri (East)
BOMBAY 400093

{ 632 92 95, 632 78 58
{ 632 78 91, 632 78 92

Branches : AHMADABAD. BANGALORE. BHOPAL. BHUBANESHWAR.
COIMBATORE. FARIDABAD. GHAZIABAD. GUWAHATI. HYDERABAD.
JAIPUR. KANPUR. LUCKNOW. PATNA. THIRUVANANTHAPURAM.